

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H04M 11/04, 11/00, H04N 7/14		A1	(11) International Publication Number: WO 95/01041
			(43) International Publication Date: 5 January 1995 (05.01.95)
(21) International Application Number: PCT/US94/06611		(81) Designated States: AM, AU, BB, BG, BR, BY, CA, CN, CZ, FI, GE, HU, JP, KG, KR, KZ, LK, LV, MD, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SI, SK, TJ, UA, UZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 22 June 1994 (22.06.94)			
(30) Priority Data: 081,876 23 June 1993 (23.06.93) US			
(71)(72) Applicant and Inventor: FEINBERG, David, H. [US/US]; 2 Apollo Road, Manalapan, NJ 07726 (US).		Published <i>With international search report.</i>	
(74) Agents: FANUCCI, Allan, A. et al.; Pennie & Edmonds, 1155 Avenue of the Americas, New York, NY 10036 (US).			

(54) Title: AN INTEGRATED TELEPHONE, INTERCOM, SECURITY AND CONTROL SYSTEM FOR A MULTI-UNIT BUILDING

(57) Abstract

An integrated telephone, intercom, security and control system for a building having a plurality of units (100), utilizing a plurality of telephone lines (C, F) located throughout the building. One end of the telephone lines (C, F) are connected to telecommunications equipment (4, 5, 6) and the other end of the telephone lines (C, F) are connected to monitoring stations (18, 19) via a switching unit (1). A plurality of sensors (7-12) located in the units (100) and throughout common areas of the building are arranged for generating signals in response to conditions therein, which are then transmitted to a plurality of control modules (3) connected to the switching unit (1) by the telephone lines (C, F). The control modules (3) are further adapted to send information to the monitoring stations (18, 19) via the telephone lines (C, F) indicative of the respective conditions.

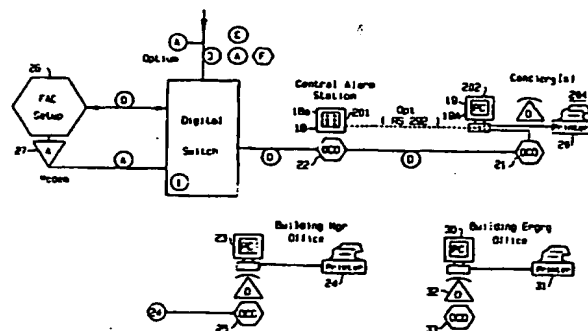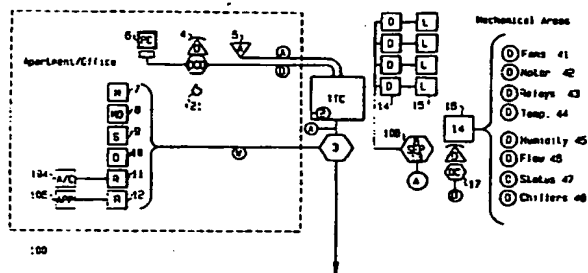

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MD	Republic of Moldova	TJ	Tajikistan
DE	Germany	MG	Madagascar	TT	Trinidad and Tobago
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain	MN	Mongolia	US	United States of America
FI	Finland			UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

AN INTEGRATED TELEPHONE, INTERCOM, SECURITY
AND CONTROL SYSTEM FOR A MULTI-UNIT BUILDING

BACKGROUND OF THE INVENTION

5

The present invention relates to a building control system and in particular to an integrated telephone, intercom, security and control system for a multi-unit building.

10

It is known to provide security systems for multi-unit buildings. For instance U.S. Patent No. 4,644,104 to Middlemiss discloses a security system for a multi-unit facility such as a hotel wherein access to each unit or room is accomplished through a door structure which incorporates a separate locking assembly. The locking assembly is of the keyless entry type wherein a present code is fed into an electronically controlled lock through a plurality of switches for authorized entry. Each of the actuating facilities associated with each closure is capable of having a stored preset code changed through operation of a microprocessor. Telephone lines interconnect the activating and locking facilities associated with each room to a central control facility.

15

20

25

U.S. Patent No. 5,134,644 to Garton et al. also discloses an alarm and security system. One embodiment of that system includes a communications panel having a first transceiver for receiving information about one or more desired conditions in one or more geographical areas and for receiving a control signal and for transmitting the desired condition information and control signal to a base station. The system accepts information from an existing panel via telephone lines and transfers a full data message to a base station.

30

35

- 2 -

Similarly, U.S. Patent No. 4,023,139 to Samburg discloses a security control and alarm system including a central station communicating with each of plural remote stations, or facilities, protected by the system. The remote stations may be multi-zone office buildings, shopping centers, or any of various specialized applications. The central station provides point-to-point monitoring of each protection sensor device at each remote station. Protection sensors of any desired type are encompassed by the system, including detectors for unauthorized entry, fire, smoke, mechanical equipment failure and the like. The central station also provides remote control of various security functions including selective arming and disarming of the remote station, resetting of the alarm condition following an alarm activation, operating doors to permit access to authorized personnel, operating elevators to restricted, selected floors of a building and any of various other types of desired control functions. The system also may provide general remote control of non-security building functions. Communication between the central and remote is provided by a multiplexer over standard voice grade telephone lines. Each person authorized to gain access to a remote, protected facility is provided a password. At the entrance of the facility, there is provided a telephone with a direct line connection to the central station. An individual wishing to gain access must call and give the correct password to an operator at the central station in response to which the operator issues a control to the remote facility for unlocking the entrance door.

35

Additionally, known systems provide intercommunication and alarm telephone systems for residential use. For instance, U.S. Patent No. 4,097,690 to Chants et al. discloses an intercommunication and alarm telephone system having a common control in the form of a clock driven central unit connected to an alarm control unit and one telephone line shared by a plurality of station units. The central control unit provides means for answering and placing outside telephone calls to a central telephone office, holding and transferring such calls, giving paging and intercom services, giving suitable alarms, and such other services as may be necessary or desirable.

Finally, various control and communications systems are known for use in the residential environment. For example, U.S. Patent No. 4,665,544 to Honda et al. discloses a home control system and interphone system including a pair or plural pairs of home information transmission paths (referred to as home bus); information outlets provided at the home bus which serve as connection nodes for appliances; and a plurality of room monitor controllers (hereinafter referred to as RMC) each having a built-in interface unit which has a control function element peculiar to respective rooms and carries out communication control between the information outlets and the appliances.

Similarly, U.S. Patent No. 4,899,217 discloses a communication and energy control system for houses. That patent describes an automated system for providing different services within a house. The system includes an appliance coordination data network for communicating relatively low speed appliance digital data within a house, a high capacity data

network for transferring high speed digital data within the house, an energy distribution system for distributing energy throughout the house, an analog services distribution system for distributing
5 conventional analog signals throughout the house and a video services distribution network for distributing video services throughout the house. The appliance coordination network interfaces with the energy
10 distribution system to control the flow of energy to appliances throughout the house responsive to a digital request or interrogation signal that is emitted from the appliance itself.

However, none of the systems described above
15 disclose an integrated telephone, intercom, security and control system that is particularly well suited for a multi-unit building. Accordingly, the present invention provides such a system and includes a number of advantages over the previous systems described
20 above.

SUMMARY OF THE INVENTION

The present invention relates to an integrated telephone, intercom, security and control
25 system for a building having a plurality of units. The system includes a plurality of telephone lines (i.e., pairs of telephone lines) located in the building and connected at one end to telecommunications equipment located in the units and throughout common areas of
30 the building.

A switching means is connected to the other end of each of the telephone lines and arranged to connect at least one of the telephone lines to at least one other telephone line either inside the
35 building or to an outside telephone line at the option of the user of such telecommunications equipment.

While the switching means is preferably located within the building it services, it may be located remotely from the building and connected thereto by telephone
5 company lines or private telephone lines. The switching means is arranged such that each telephone line connected thereto has a unique telephone number.

As a result of the above-described arrangement, the telephone lines function as both an
10 intercom system and a telephone system for the building.

A plurality of sensors located in the units and throughout common areas of the building are arranged for generating signals in response to
15 conditions therein. A plurality of control modules connected to the switching means by at least one of the telephone lines is adapted to receive the signals from the sensors and determine the respective conditions. A central monitoring station, including
20 at least a memory device and an output device, is also connected to the switching means via at least one of the telephone lines. The control modules are adapted to send information to the central monitoring station, via the telephone lines, indicative of the conditions,
25 and the central monitoring station is adapted to at least receive the information, store the information in its memory and output data indicative of the various conditions.

The control modules are also adapted to
30 selectively send information to the central monitoring station only upon determining a change in at least one of the conditions. Such a changed condition represents an alarm signal to the central monitoring station. Each control module is further adapted to
35 accept commands from a user calling its unique telephone number via said switching means. The

commands include selectively activating/deactivating at least one of said sensors and obtaining status information regarding the sensors.

5 Preferably the control modules are further adapted to transmit signals to at least one device, e.g., an air conditioning unit, located in at least one of said units to activate/deactivate the device.

10 The central monitoring station of the present invention preferably includes at least a central alarm station and a concierge station having a personal computer and a printer. The central alarm station is adapted to receive the information from each of the control modules and transmit a data stream
15 representative of the information to the personal computer. The personal computer is adapted to receive and store data transmitted thereto and output to said monitor and printer said alarm condition and said user programmed information.

20 Additional monitoring stations similar to the concierge station may also be included to receive information from control modules via the central alarm station. The central monitoring station and the additional monitoring stations may be arranged to
25 control distinct areas of the building and also arranged to provide redundant control.

 Preferably, the system of the present invention includes means for transmitting non-broadcast television signals at least to a plurality
30 of said units. Closed circuit cameras are located in common areas of the building and may be coupled to the means for transmitting non-broadcast television signals. The central monitoring station may further include means for selectively connecting the outputs
35 of the closed circuit cameras to the means for transmitting non-broadcast television signals based on

user information sent to the central monitoring station via the telephone lines. Outside cable company lines or other "pay per view" transmissions
5 can also be coupled to the means for transmitting non-broadcast television signals and monitored and controlled by the central monitoring station.

The preferred system of the present invention can further include a file server having a
10 memory device and connected to said switching means by at least one telephone line. Each of the units having access to the file server via the telephone lines. The file server is adapted to store resident software that can be selectively accessed via said telephone
15 lines by said users. Also, the file server can be coupled to the means for transmitting non-broadcast signals such that, for example, inter-building pay-per-view movies or sporting events, can be controlled.

20 BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A and 1B are schematic diagrams of the integrated telephone, intercom, security and control system for a multi-unit building according to a preferred embodiment of the present invention.

25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1A and 1B depict the elements of the preferred embodiment of the present invention and shows their interconnection. The system shown is
30 typically located in a single multi-unit office building or apartment building (cooperative, condominium, etc.) having numerous users (tenants, office personnel, building supervisory personnel, etc.). The units, an exemplary one indicated by the
35 dotted line 100, are accordingly individual offices or apartments. Additionally, the units can be common

areas in such buildings such as stairwells, physical fitness centers, laundry facilities, meeting rooms, rooftops and the like. Further, multiple buildings
5 can be controlled by a single one of the systems described herein.

Throughout the building there are a plurality of telephone lines to the individual units, to common areas and to areas maintained by supervisory
10 personnel. These lines may be standard copper lines (C) or fiber optic lines (F) and may carry information in analog (A) and/or digital (D) form. At one end, each of the telephone lines is connected to telecommunications equipment that may include analog
15 and/or digital telephones (via analog telephone jacks 5 and digital telephone jacks 4), modems (facsimile machines), personal computers 6 (via modems, digital computer outlets (DCOs) 21, or digital computer modules (DCMs)). Preferably, each unit includes at
20 least one telephone line and the telecommunications equipment is typically found therein, although it will also be found in the common areas and at stations maintained by supervisory personnel. The operation of such telecommunications equipment is well known and
25 will be understood by those skilled in the art.

At the opposite end, each of the telephone lines terminates in a switch 1. Switch 1 is a typical private branch exchange (PBX) switch well known by those skilled in the art. Preferably, the switch 1
30 has the capacity to interface with both analog (A) and digital (D) telephone lines including fiber optic (F) lines, however, the switch 1 may be of the type designed for solely an analog or digital environment. The switch 1 is typically located in the building in
35 which it services, but may be located in the central office of a local telephone company and connected to

the building via telephone company lines or private telephone lines. For purposes of example, the switch employed herein is a Rolm™ 9751 Computerized Branch
5 Exchange.™ Such a switch is designed for both analog and digital interfacing and as such is particularly well suited for the present invention. From 50 to 20,000 telephone lines (or more) can be connected to the switch 1 with each line having its own distinct
10 telephone number. The switch 1 is also connected via outside telephone company lines or private telephone lines to allow for local and long distance calling.

The switch 1 is adapted to connect any one of the telephone lines in the building to another
15 telephone line in the building or to an outside telephone line at the selection of the user of the telecommunications equipment. In a well known fashion, when a user proceeds a call with the number "9", for example, the switch is programmed to
20 recognize this as a request to connect the user's line to another telephone line within the building. When a call is not proceeded by the number "9", the switch recognizes this as a request for an outside telephone line. Of course, via a simple modification, the
25 switch 1 can be programmed to recognize the inverse functions, i.e., a call proceeded by a "9" as a request for an outside telephone line and a call not proceed by a "9" as a request for another telephone line within the building. As such, the switch 1
30 serves to provide an intercom system for the building and the normal local and long distance calling services for the building.

Additionally, the switch 1 is able to connect any one of the telephone lines in the building
35 to multiple telephone lines in the building or to multiple outside telephone lines at the selection of a

user. This allows for, in addition to typical
"conference calling" using telephone company lines,
inter-building conference calling without using the
5 telephone company lines and the tariffs associated
therewith.

Telephone terminal cabinet (TTC) 2 is a
standard telephone interconnect cabinet that is
typically employed in multi-unit buildings of the type
10 herein described to connect telephone lines from the
individual units to the switch 1. The TTC simply
serves as a common arrangement for collecting each of
the telephone lines. Electrically, the TTC may not
even exist since it simply serves as an interconnect.
15 In fact, each telephone line can be directly connected
to the switch 1, although this is seldom done due to
the ease with which the TTC permits trouble-shooting.
The TTC typically contains 110 blocks and serves
multiple floors with the number of TTCs per building
20 dependent on the number of telephone lines required on
each floor.

Throughout the building there are located a
plurality of different detectors and sensors for
generating signals representative of various
25 conditions in each of the units and in common areas of
the building. For purposes of example, a motion
detector 7, a smoke detector 9 and a door contact
detector 10 are shown. The detectors function in a
conventional fashion and are well known by those
30 skilled in the art. For example, the door contact
detector 10 can be a simple switch indicating the
open/closed status of the door to an individual unit,
a door within the unit or a common area door such as a
door to a stairwell. Additional detectors and
35 sensors, which will all be similarly well understood
by those skilled in the art, can include a hazardous

air condition sensor, a sensor to sense movement of a person or to sense movement of personal property, such as a classic painting, from its usual location and a
5 detector to determine the open/closed condition of the windows to a unit. For purposes of clarity, these various sensors and detectors are collectively referred to herein as "sensors".

Each of the sensors is connected to and
10 communicates with a control module 3 (described below) via a copper wire pair (W). Although a copper conductive wire pair, one for each sensor, is currently the connector of choice due to its low cost and reliable operation, wireless
15 transmitters/receivers employing existing X-10 technology, for example, can be employed. Additionally, it is also possible that a single addressable communication link be established between each of the sensors and an associated control module
20 3.

The sensors output signals via the wire (W) or otherwise to the control module 3. These signals are indicative of conditions in the units in which the sensors are located. For instance, a smoke detector
25 will output a signal indicative of smoke in one of the units or in a common area should such a condition arise. Similarly, a door contact detector will output a signal indicative of the open/closed status of a door. The exact nature of the signals will be
30 discussed in more detail below.

The control module 3 is essentially the "brains" of the present invention. The control module 3 is connected to the switch 1 by a telephone line via the telephone termination cabinet 2, or is
35 directly connected to the switch 1 via a telephone line or both. In a typical multi-story apartment or

office building, there will be numerous control modules 3 each connected to the switch 1 as described above. Each module 3 can be responsible for a particular section of the building, e.g., signals from common areas only, signals from floors 3-8, etc. The control module 3 includes at least a memory and processing means. A typical control module 3 for use with the present invention is a standard multiplex panel. Such a device is programmable as is known by those skilled in the art so as to allow various control functions.

As noted above, the control module 3 is connected to each of the sensors by the copper wire pairs (W) (although only a single wire representative of a single pair is shown in the figures, there will be one wire pair for each sensor in a typical arrangement) and is adapted to receive the output signals and determine from the output signals respective conditions. Each control module 3 is further adapted to send information to a central monitoring station 18,19 (discussed below) via the telephone lines indicative of the determined conditions. Preferably, each control module 3 does not continuously send information to the central monitoring station 18,19, but only selectively sends information upon determining a change in at least one of the conditions.

It should be noted at this point that when the central monitoring station 18,19 receives information from the control module 3 indicating a changed condition, such a change represents an alarm condition to the central monitoring station 18,19.

When the control module 3 does not detect a changed condition or an alarm condition with regard to a particular sensor, a closed circuit condition having

a predetermined resistance exists in the circuit formed by the control module 3, the copper wire and the sensor. However, should a smoke condition (for example) arise in the vicinity of a smoke detector, the smoke detector will, in a conventional fashion, change the resistance in the circuit containing the control module 3. The control module 3 is designed to detect this changed resistance and determine that a smoke condition exists in the vicinity of the smoke detector.

Similarly, cutting the copper wire or putting a jumper on the wire will also result in a changed resistance recognizable to the control module 3 as such. This arrangement helps to make the system of the present invention tamper-proof. Alternatively, a hall effect device connected to each of the sensors and to the control module 3 could be used to produce a voltage recognizable in response to a changed condition.

The door contact sensor 10 as well as each of the other sensors will function in a similar fashion. Thus, when a door connected to such a sensor is closed (in its normal position), a closed circuit having a predetermined resistance will be seen on the copper wire connecting that sensor to the control module. However, when the door is opened, the resistance in the circuit will change indicating to the control module the open door.

Once detecting these changed conditions, the control module 3 will selectively send the information via the telephone lines, through the switch 1 and to the central monitoring station 18,19 also connected to the switch via at least one telephone line. The information sent to the central monitoring station 18,19 can include at least one bit of information for

each sensor connected to the control module 3. The bit of information having a logic level based on the resistance of the circuit. Alternatively, industry
5 standard device codes such as X-10 can be employed.

The central monitoring station 18,19 can take on numerous forms and need only include a memory device and an output device. The central monitoring station 18,19 is adapted to receive and store the
10 information sent by the control modules 3 and output information indicative of the status of the sensors.

While a simple personal computer would be sufficient to serve as the central monitoring station 18,19, in the preferred embodiment of the present
15 invention two distinct devices are employed; a central alarm station 18A and a concierge station 19A. The central alarm station 18A receives information via multiple telephone lines from all of the control modules 3 in the building. The central alarm station
20 18A converts the information from the multiple inputs into a data stream which it sends to the concierge station 19A via a conventional RS-232 connector 201 or via a digital telephone line be employing a DCM 22. The concierge station 18A is typically a personal
25 computer with an associated monitor 202 and printer 204 which receives and stores the information and sends an output including at least alarm conditions to the monitor and printer.

For instance, if the control module 3
30 detects a smoke condition in a particular location, a change in resistance appears on the line connecting the control module 3 and the active smoke detector. The control module immediately "calls" the central alarm station 18 and forwards the information
35 regarding the smoke condition. Such information is immediately forwarded to the concierge station 19 and

- 15 -

displayed on the monitor 202 and/or the printer 204. Additionally, the control module can be programmed to also call the appropriate fire department in the event
5 of such a smoke condition.

The central monitoring station 18,19 is further operable to display user programmed instructions stored in its memory. For example, a tenant of a particular unit can have programmed into
10 the central monitoring station his choice of information to be displayed in the event that unauthorized personnel enter his apartment. Such information can include instructions on the appropriate persons to contact and notify in the event
15 of such an alarm condition.

As noted above, each of the telephone lines connected to the switch 1 has a unique telephone number associated therewith. Further, the control module 3 described above is connected to the switch 1
20 and is adapted to accept commands from a user calling its unique telephone number. Thus, tenants of a particular building or office personnel can call the control module 3 and enter various commands. Preferably, each user is assigned a unique user number
25 and/or password which are stored in the memory of the control module 3. As a result, a user gaining access to the switch 1, via a telephone line from inside or outside the building (including cellular phones, mobile phones and the like), who supplies an
30 appropriate user number and/or password, can enter commands. Typically, the commands are entered via a touch tone telephone, however, the control module 3 can be programmed to accept certain voice commands. In one arrangement, a user is assigned a six number
35 entry code with the first two digits signifying a

- 16 -

partition on the control module 3 and the last four digits representing user codes.

As also noted above, each control module 3
5 does not instantaneously send information to the central monitoring station 18,19 regarding a changed condition. Rather, the sending of information by the control module 3 is performed selectively. While it is of course desirable to immediately send information
10 regarding a smoke or fire condition to the central monitoring station 18,19, this is not equally desirable with all conditions. With a condition such as an open door condition, it is often desirable to delay output to the central monitoring station 18,19
15 for a predetermined period of time (e.g. 10 seconds) in order to afford an authorized user, e.g., the tenant of the particular apartment, the opportunity to deactivate (the "deactivate" command is discussed below) the respective sensor. Therefore, the system
20 of the present invention provides for the selective output or sending of information by the control modules 3 to the central monitoring station 18,19.

The central monitoring station only receives information from the control modules when there is a
25 change in condition. In order to detect if a control module is operating properly or is disabled, however, the central monitoring station of the present invention periodically polls each of the control modules to determine if the modules are still active.
30 If they are not, the central monitoring station outputs a message to this effect. In addition, when battery operated sensors are used, the central monitoring station can poll the sensors via the control modules to determine if the battery charge is
35 sufficient for normal operation, and to output a message when the battery charge is low.

While the information controlling the selective output of information could be originally stored in the memory of the respective control modules 3, such a system requires the programming of numerous devices throughout a large building and would be inefficient. Additionally, in the event of a power loss, each of the control modules would have to be reprogrammed.

Advantageously then, the selective output of data by the control modules 3 is controlled by user programmed information stored in the memory of the central monitoring station 18,19 and downloaded to a memory in the control module 3 at the direction of supervisory personnel. This information can include the amount of time from the determination of a changed condition the control module 3 allows for entry of a deactivation command as discussed above.

In a similar fashion, user identification numbers and passwords can be stored in the central monitoring station and downloaded to the individual control modules.

Preferably, the commands entered by a user can include activating and deactivating some or all of the sensors and obtaining status information (alarm conditions) concerning the sensors. As described above, each sensor is connected to its associated control module by individual conductive wire pairs showing various resistances. The control module is programmed to recognize the resistance of each one of these wires as one bit of information of a block of information for each user. When a user enters a command for status information via a touch tone phone (after supplying appropriate identification and/or password information), the control module simply scans the block to verify that the state of none of the bits

has changed since being activated. If any bits have changed, the user is appropriately advised of the existing alarm condition, e.g., "bedroom window ajar,"
5 by voice synthesis means in said command module.

When a sensor is deactivated by a user via appropriate commands, the control module 3 simply disregards the signal received from the deactivated sensor. Further, the activation status of each of the
10 sensors can also be stored by the control module 3 and provided to a user via entry of appropriate commands.

In addition to the various sensors and detectors described above, preferably the present invention also includes a sensor located in each
15 office or apartment that is designated for activation by a person in physical distress in the office or apartment; a so-called "panic button" 7. This button can be used for medical emergencies and/or physical
20 peril, e.g., an unauthorized person is in the apartment or office. Like the other sensors and detectors, this type of detector may be hardwired to
or in wireless transmission with the control module 3 and is similarly controlled. In addition, the control
25 module 3 can be programmed to recognize entry of a code which signifies an emergency condition, rather than deactivation of the sensor, in order to send a silent alarm to the central station.

Not only is the control module 3 of the present invention adapted to receive signals from the
30 various sensors described above, the control module is further operable to transmit signals to various devices to activate/deactivate the devices. These devices can include air conditioning units 104, video cassette recorders, radios, televisions, heaters,
35 photocopy machines, pet feeders, lamps, etc. (collectively indicated by 106).

Based on presently available technology, each of these devices is preferably connected to the control module via a conductive wire and a low voltage relay 11,12. Among the commands the control module is adapted to accept from a user are commands to activate and deactivate the devices via the relays. Furthermore, the status information produced by the command modules at the request of a user can also include the activation/deactivation status of various devices.

As discussed above, throughout the building there are a plurality of sensors connected to various control modules. Preferably, a group of these sensors are employed to monitor conditions in the common areas of the building and are connected to a control module 108 dedicated to that purpose. These sensors can be employed to monitor the opening and closing of doors to stairwells 14, laundry rooms, etc., and to monitor various other conditions in such common area. Additionally, the dedicated control module 108 can transmit signals, based on commands from the central monitoring station, for example, to an electrical door latch 15 connected to common area doors 14 that will open or close such door.

In addition to the central monitoring station 18,19, the system of the present invention preferably includes additional monitoring stations 23 and 30 each having a memory device and an output device and each connected the switch 1 via at least one of the telephone lines. One of these stations 23 is preferably located in a building manager's office and one in the office of a building engineer 30. These additional monitoring stations are generally arranged to receive data from the central alarm station 18 via a telephone line. An RS-232 line can

- 20 -

instead be used for this purpose. Thus, only a single central alarm station 18A is employed for all of the monitoring stations.

5 Each of the monitoring stations is preferably arranged to receive data from control modules 3 located in different sections of the building. Thus, the additional monitoring station 23 in the building manager's office can be arranged to
10 receive information from the control module 108 dedicated to the common areas, while the central monitoring station can receive information from control modules dedicated to apartments or offices. Alternatively, in a multi-story office building, one
15 of the control stations can receive information from control modules on the upper floors of the building and one control station can receive information from control modules on lower floors of the building. For purposes of security, however, it may be desirable for
20 each control station in such a multi-story building to receive information from all of the control modules throughout the building and to only process information for selected sections, e.g., only the upper or lower floors of the building, in normal use.
25 In the event of an emergency situation such as a terrorist bomb destroying some, but not all, of the control stations, the surviving control stations are then adapted to process information from any of the control modules as necessary. In operation, the
30 various monitoring stations poll each other or in some fashion communicate in order to provide for automatically allowing another station to pick up functions of a non-functioning station.

 The preferred embodiment of the present
35 invention additionally includes at least one mechanical alarm panel 18 connected to the switch 1

via at least one telephone line and a DCM 17. As is known by those skilled in the art, a mechanical alarm panel (MAP) is a device used to monitor a plurality of devices throughout the building. The MAP is generally connected to a plurality of analog devices and is arranged to produce a digital output. The output of the MAP is sent to supervisory personnel such as the building engineer at her associated control station 23 via the switch 1.

The analog devices 41-48 typically include thermometers, barometers, relays, fans, motors, flow meters, chillers, boilers and waterheaters. Digital devices may also be included.

Additionally, each unit of the building can include various meters for monitoring utility use (gas, oil, water, electricity, steam, etc.) and each having an analog or digital output connected to a MAP. This information can be sent to building supervisory personnel who can use it to determine such information as the cost per utility per unit and to bill for use of such utilities.

Preferably, each of the units of the building is also wired to receive non-broadcast television signals. This wiring can be the telephone wires (in particular, fiber optic telephone wires) or distinct coaxial type wiring. Additionally, a plurality of closed circuit cameras are located in common areas of the building. The closed circuit cameras have outputs adapted to be coupled to the wiring. The central monitoring station includes means (such as a simple electronic switch) for selectively connecting outputs of the various closed circuit cameras to individual apartments in accord with instructions, sent to the central monitoring unit by a tenant, for example, via the telephone lines. Thus,

if there are closed circuit cameras located in a laundry room, on the rooftop and in the physical fitness center of a building, a father wishing to
5 monitor the status of his son washing clothing in the laundry simply calls the central monitoring station, enters an appropriate command and a monitor in his apartment (e.g., his usual television set) is switched to the output from the closed circuit camera in the
10 laundry room. Just as easily, the father can call the central monitoring station and switch to the output from the rooftop closed circuit camera to monitor the status of his sunbathing daughter.

Furthermore, signals from an outside cable
15 company can also be coupled to building wiring to provide cable TV reception for the tenants. The central monitoring station can also be used to monitor and control cable TV signals in a fashion identical to the closed circuit television control described above.
20 Thus, selection of pay-per-view movies, concerts or sporting events and premium channels can all be effected by a user simply placing an intercom call to the central monitoring station.

The preferred embodiment of the present
25 invention also include a file server 26 having a memory device and connected to the switch 1 by a telephone line. Each of the units has access to the file server over the building's telephone lines and switching means. Thus, resident software stored in
30 the file server can be accessed by any unit by issuing appropriate commands over the telephone lines. Additionally, the file server 26 is coupled to the building's wiring and can be used to implement a form of inter-building pay-per-view and interactive
35 software or subscriber services. Users wishing to view a certain movie or use interactive software or

subscriber services will simply have to call the file
server's unique telephone number and provide the
necessary commands via a touch tone telephone to
5 access such a movie.

Obviously, many modifications and variations
of the present invention are possible in light of the
above teachings. It is therefore to be understood
that within the scope of the appended claims, the
10 invention may be practiced otherwise than is
specifically described.

15

20

25

30

35

THE CLAIMS

I claim:

- 5 1. An integrated telephone, intercom, security
and control system for a building having a plurality
of units comprising:
- 10 a plurality of telephone lines located
in said building and connected at one end to
telecommunications equipment located at
least in said units;
- 15 switching means connected to the other
end of said plurality of telephone lines and
arranged to connect at least one of said
telephone lines either to at least one other
telephone line or to an outside telephone
line;
- 20 a plurality of sensors located in each
unit for generating signals indicative of
conditions therein;
- 25 at least one control module connected
to said switching means by at least one of
said telephone lines and adapted to at least
receive said signals and determine said
conditions from said signals; and
- 30 a monitoring station, including a
memory device and an output device,
connected to said switching means by at
least one of said telephone lines,
- 35

said at least one control module adapted to send information to said monitoring station via said telephone lines indicative of said conditions and said monitoring station adapted to receive and store said information in said memory and output data indicative of said conditions.

5
10 2. The system according to claim 1 wherein said at least one control module is further adapted to selectively send information to said monitoring station upon determining a change in at least one of said conditions.

15
 3. The system according to claim 2 wherein said monitoring station periodically polls each of said at least one control modules to determine if said modules are still active and outputs an indication of any
20 inactive modules.

 4. The system according to claim 1 wherein said plurality of telephone lines operate as both an intercom system and a telephone system for said
25 building.

 5. The system according to claim 1 wherein said building is an office building.

30 6. The system according to claim 1 wherein said switching means is located remotely from said building and is connected to said building by a private telephone line.

35 7. The system according to claim 1 wherein said switching means is located remotely from said building

and is connected to said building by an outside telephone company line.

5 8. The system according to claim 1 wherein said plurality of telephone lines include analog lines and digital lines.

10 9. The system according to claim 1 wherein said telephone lines include copper lines and fiber optic lines.

15 10. The system according to claim 2 wherein said plurality of sensors include sensors for detecting at least one of a smoke condition, a hazardous air condition, a fire condition, an open/closed condition of at least an entry door to at least one of said units, an open/closed condition of a window of at least one of said units, movement of a person in at least one of said units, and movement of personal property from a predetermined position in at least one of said units.

25 11. The system according to claim 10 wherein the selective sending of information by said at least one control module is controlled by user programmed information stored in said memory of said monitoring station and downloaded to a memory in said at least one control module at the direction of supervisory personnel.

35 12. The system according to claim 11 wherein said downloaded user programmed information includes the amount of time from determination of a change in said at least one of said conditions, said at least one condition must persist for a predetermined time

interval before the sending of information in response to the changed condition.

5 13. The system according to claim 10 wherein said monitoring station interprets information received from said at least one control module indicating a changed condition as an alarm condition.

10 14. The system according claim 13 wherein said monitoring station is further operable to display user programmed instructions stored in said memory of said monitoring station in response to said alarm condition.

15 15. The system according to claim 14 wherein said user includes at least one of the following: a tenant of one of said units, an office worker, a building supervisor, a building engineer and a unit
20 owner.

16. The system according to claim 10 wherein said sensors are each connected to said at least one control module by a pair of electrically conductive
25 wires.

17. The system according to claim 16 wherein a current flows through a normally closed circuit having a predetermined resistance formed by one of said
30 plurality of sensors, said electrically conductive wires and said at least one control module and wherein a change in condition is determined by said at least one control module by a change of said resistance in said circuit created by one of said plurality of
35 sensors in response to conditions.

18. The system according to claim 16 wherein a
hall effect device connected to one of said plurality
of sensors and connected to said at least one control
5 module by a pair of electrically conductive wires
produces a voltage indicative of a change in
condition.

19. The system according to claim 10 wherein
10 each sensor is connected to said at least one control
module by wireless transmitters and receivers.

20. The system according to claim 17 wherein the
information sent to said monitoring station by said at
15 least one control module includes industry standard
device codes.

21. The system according to claim 1 wherein said
plurality of sensors includes a sensor located in at
20 least one of said units and designated for activation
by a person in physical distress in at least one of
said units.

22. The system according to claim 1 wherein said
25 telecommunications equipment includes at least one of
the following: telephones, modems, digital computer
modules, digital computer outlets, personal computers,
and facsimile machines.

23. An integrated telephone, intercom, security
30 and control system for a building having a plurality
of units comprising:

a plurality of telephone lines located
35 in said building and connected at one end to

telecommunications equipment located at least in said units;

5 switching means connected to the other end of said plurality of telephone lines and arranged to connect at least one of said telephone lines either to at least one other telephone line or to an outside telephone line such that each telephone line connected thereto has a unique telephone number;

10

 a plurality of sensors located in each unit for generating signals indicative of conditions therein;

15

 at least one control module connected to said switching means by at least one of said telephone lines and adapted to at least receive said signals and determine said conditions from said signals; and

20

 a monitoring station, including a memory device and an output device, connected to said switching means by at least one of said telephone lines,

25

 said at least one control module adapted to send information to said monitoring station via said telephone lines indicative of said conditions and said monitoring station adapted to receive and store said information in said memory and output data indicative of said conditions.

30

35

24. The system according to claim 23 wherein
said at least one control module is adapted to accept
commands from a user calling its unique telephone
5 number via said switching means.

25. The system according to claim 24 wherein
said at least one control module sends information to
said monitoring station by calling its unique
10 telephone number.

26. The system according to claim 25 wherein
said at least one control module connected to said
switching means by a single telephone line is adapted
15 to drop a call from a user in the event information
indicative of a changed condition is to be sent to
said monitoring station.

27. The system according to claim 24 wherein
20 user identification codes are stored in said
monitoring station and downloaded to a memory in said
at least one control module at the direction of
supervisory personnel.

28. The system according to claim 27 wherein
25 said at least one control module will only accept said
commands after receiving recognizable user
identification codes.

29. The system according to claim 28 wherein the
30 selective sending of information by said at least one
control module is controlled by user programmed
information stored in said memory of said monitoring
station and download to the memory in said at least
35 one control module at the direction of supervisory
personnel.

30. The system according to claim 29 wherein
said downloaded user programmed information includes
the amount of time from determination of a change in
5 said at least one condition by which a user must input
a recognizable identification code to prevent said at
least one control module from sending to said
monitoring station information indicating the changed
condition.

10

31. The system according to claim 28 wherein
said at least one control module is adapted to
recognize commands entered via a touch tone telephone.

15

32. The system according to claim 28 wherein
said at least one control module is adapted to
recognize voice commands.

33. The system according to claim 28 wherein one
20 of said user identification codes signifies an
emergency condition and the control module transmits a
signal of such condition silently to said monitoring
station.

34. The system according to claim 24 wherein
25 said commands include selectively
activating/deactivating at least one of said plurality
of sensors and said at least one control module
disregards the signal received from a deactivated
sensor.

30

35. The system according to claim 34 wherein, in
response to a command requesting status information,
said at least one control module is adapted to provide
the user with information concerning the
35 activation/deactivation status of selected ones of
said plurality sensors.

36. The system according to claim 34 wherein, in response to a command requesting status information, said at least one control module is adapted to provide
5 the user with information concerning any changed conditions.

37. The system according to claim 35 wherein said at least one control module includes a voice
10 synthesizer for producing said status information.

38. The system according to claim 24 wherein said at least one control module is further adapted to transmit signals to at least one device located in at
15 least one of said units to activate/deactivate said at least one device.

39. The system according to claim 38 wherein said at least one control module is further adapted to
20 determine the activation/deactivation status of said at least one device.

40. The system according to claim 39 wherein said at least one control module is further adapted to
25 send information indicative of a change in activation/deactivation status of said at least one device to said monitoring station.

41. The system according to claim 38 wherein
30 said at least one device includes at least one of the following: an air conditioning unit, a video cassette recorder, a radio, a television set, an oven, a heater, a pet feeder, a door, a door latch, a file cabinet, a personal computer and a photocopy machine.

42. The system according to claim 38 wherein said commands include commands for activating/deactivating said at least one device.

5

43. The system according to claim 42 wherein, in response to a command requesting status information, said at least one control module is adapted to provide the user with information concerning the
10 activation/deactivation status of said at least one device.

44. The system according to claim 38 wherein said devices are connected to said at least one
15 control module via a low voltage relay.

45. The system according to claim 24 wherein said building includes means for transmitting non-broadcast television signals at least to a plurality
20 of said units.

46. The system according to claim 45 further comprising a plurality of closed circuit cameras located in common areas of said building and having
25 outputs coupled to said means for transmitting non-broadcast television signals.

47. The system according to claim 46 wherein said central monitoring station includes means for
30 connecting to selected units the outputs of said closed circuit cameras to said means for transmitting non-broadcast television signals.

48. The system according to claim 47 wherein
35 said means for connecting to selected units is controlled by information sent to the monitoring

station via said telephone lines by a user of one of said plurality of units.

5 49. The system according to claim 48 wherein outside cable company lines are coupled to said means for transmitting non-broadcast television signals.

10 50. The system according to claim 49 wherein said means for transmitting non-broadcast television signals includes said plurality of telephone lines.

15 51. The system according to claim 49 wherein the monitoring station includes means for monitoring and controlling the signals sent from outside cable company lines to each unit.

20 52. The system according to claim 50 wherein monitoring and controlling include selection of pay-per-view movies.

25 53. The system according to claim 45 further comprising a file server having a memory device and connected to said switching means by at least one of said telephone lines, each unit having access to said file server via said telephone lines and said switching means.

30 54. The system according to claim 53 wherein said file server is coupled to said means for transmitting non-broadcast signals and is adapted to play movies that can be selectively accessed by units via commands issued over said plurality of telephone lines.

35

55. The system according to claim 54 wherein
said file further stores resident software that can be
selectively accessed via said telephone lines by said
5 users.

56. An integrated telephone, intercom, security
and control system for a building having a plurality
of units comprising:

10

a plurality of telephone lines located
in said building and connected at one end to
telecommunications equipment located at
least in said units;

15

switching means connected to the other
end of said plurality of telephone lines and
arranged to connect at least one of said
telephone lines either to at least one other
20 telephone line or to an outside telephone
line;

20

a plurality of sensors located in each
unit and in common areas of the building for
generating signals indicative of conditions
25 in their respective locations;

25

at least one control module connected
to said switching means by at least one of
said telephone lines and adapted to at least
30 receive said signals and determine said
conditions from said signals; and

30

a monitoring station, including a
35 memory device and an output device,

35

- 36 -

connected to said switching means by at least one of said telephone lines,

5 said at least one control module
adapted to send information to said
monitoring station via said telephone lines
indicative of said conditions and said
monitoring station adapted to receive and
10 store said information in said memory and
output data indicative of said conditions.

57. The system according in claim 56 wherein
said plurality of sensors for determining conditions
15 is said common areas include sensors for determining
the open/closed status of a plurality of doors located
in common area of said building.

58. The system according to claim 56 wherein
20 said monitoring station includes at least a central
alarm station and a concierge station having a
personal computer and a printer, said central alarm
station adapted to receive said information from said
at least one control module and transmit a data stream
25 representative of said information to the personal
computer.

59. The system according to claim 58 wherein
said personal computer is adapted to receive and store
30 data transmitted thereto and output to said monitor
and printer alarm conditions and said user programmed
information.

60. The system according to claim 58 wherein the
35 system includes at least one additional monitoring
station having a memory device and an output device

and connected to said switching means via at least one of said telephone lines.

5 61. The system according to claim 60 wherein said monitoring station and said at least one additional monitoring station receive information from control modules arranged to receive signals from sensors in different sections of said building.

10 62. The system according to claim 60 wherein said monitoring station and said at least one additional monitoring station receive information from all of the control modules in said building.

15 63. The system according to claim 62 wherein said monitoring station and said at least one additional monitoring station normally only process information from control modules arranged to receive
20 signals from sensors in different sections of said building.

25 64. The system according to claim 62 wherein each of said monitoring station and said at least one additional monitoring station are adapted to process information from any control module in any section of said building in the event of emergency conditions in said building.

30 65. The system according to claim 64 wherein each monitoring station polls each of the other monitoring stations to confirm that each of the other monitoring stations is properly functioning.

35

66. The system according to claim 60 wherein
said at least one additional monitoring station
receives information only from control modules
5 arranged to receive signals from said sensors in
common areas and said monitoring station receives
information only from control modules arranged to
receive signals from said sensors in said units.

10 67. The system according to claim 66 wherein
said at least one additional monitoring station is
located in an office of appropriate building
supervisory personnel.

15 68. The system according to claim 67 further
comprising at least one mechanical alarm panel
connected to said switching means via at least one of
said plurality of telephone lines and adapted to
receive information from a plurality of devices
20 throughout said building and forward such information
in digital form, via said switching means, to
appropriate building supervisory personnel.

25 69. The system according to claim 68 wherein
said devices include at least one of the following: a
thermometer, a barometer, a relay, a fan, a motor, a
flow meter, a chiller, a boiler and a waterheater.

30 70. The system according to claim 68 wherein
each unit includes at least one meter for measuring
consumption of a plurality of utilities and arranged
to output data to said supervisory personnel
indicative of said consumption via said at least one
mechanical alarm panel.

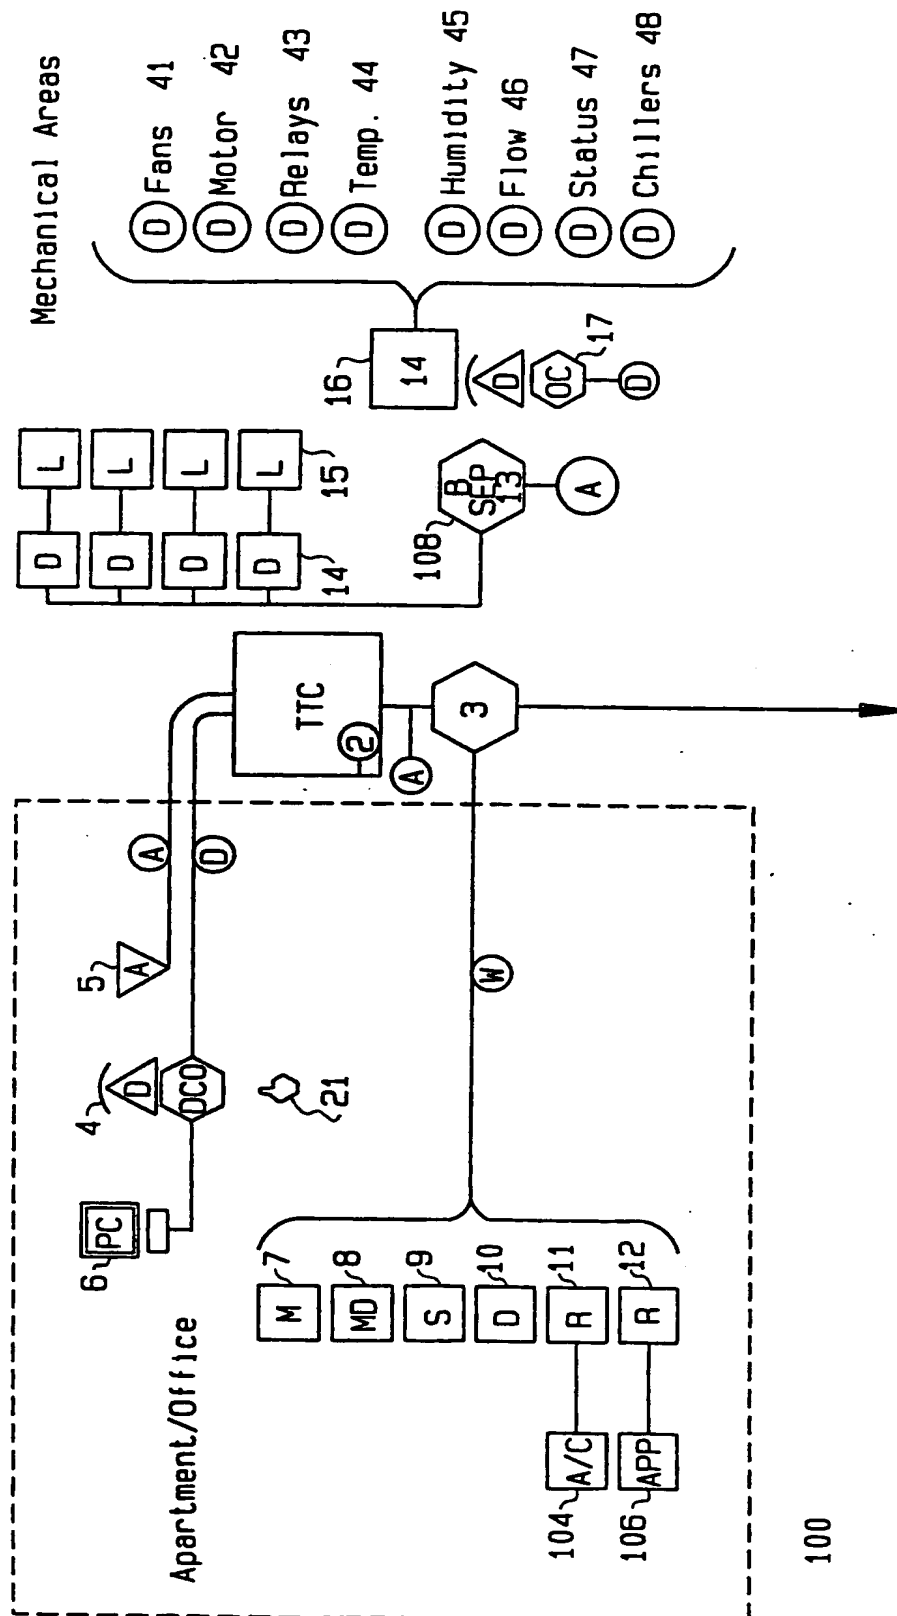


FIG. 1A

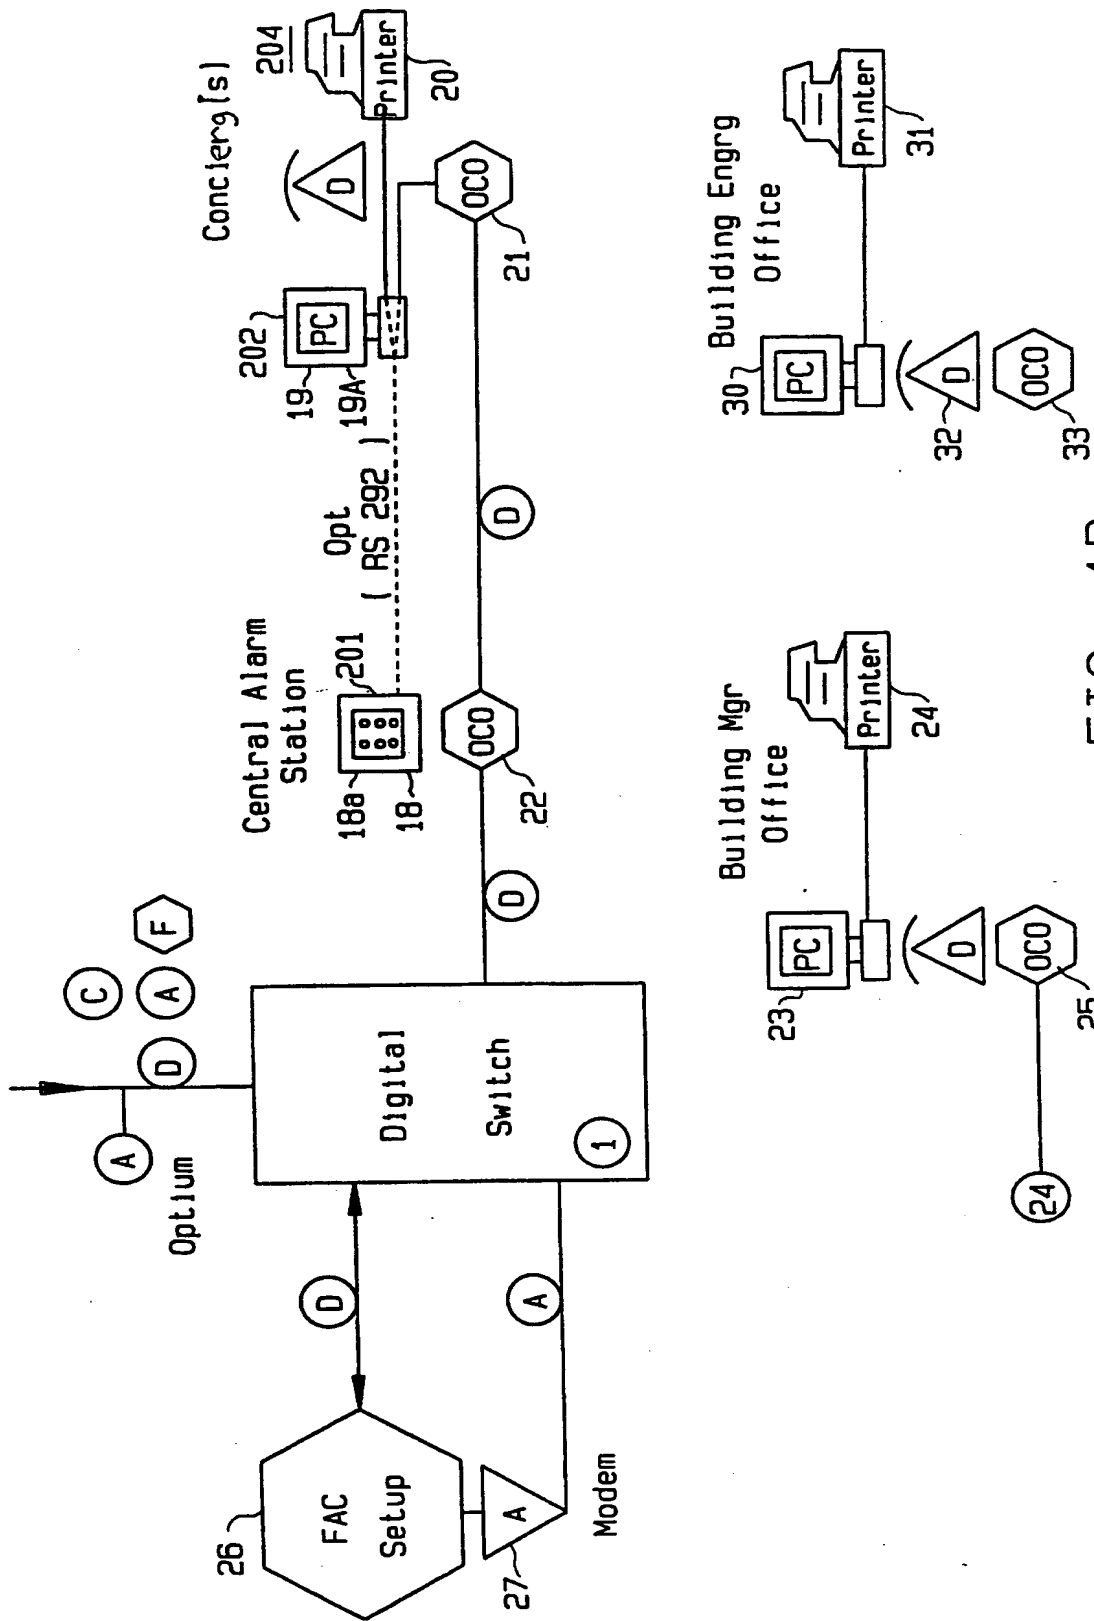


FIG. 1B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/06611

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :H04M 11/04; H04M 11/00; H04N 7/14

US CL :379/37-51, 102-105; 348/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/37-51, 102-105; 348/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
None

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
(703) 305-3230

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 3,978,479 (SCHMITZ) 31 AUGUST 1976, see the entire document.	1-70
Y	US, A, 3,937,889 (BELL, III ET AL) 10 FEBRUARY 1976, see the entire document.	1-70
Y	US, A, 4,097,690 (KUNTZ ET AL) 27 JUNE 1978, see the entire document.	1-70
Y	US, A 4,493,947 (LOVELESS) 15 JANUARY 1994, col. 1, line 65 through col. 2, line 66.	2, 11-14, 24- 31, 34-36, 38- 40, 42, 43
Y	US, A, 4,750,197 (DENEKAMP ET AL) 07 JUNE 1988, col. 9, lines 1-21.	45-47, 49, 50, 54

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"A" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

13 SEPTEMBER 1994

Date of mailing of the international search report

11 OCT 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JASON CHAN

Telephone No. (703) 305-4729

INTERNATIONAL SEARCH REPORT**International application No.**
PCT/US94/06611**C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,308,430 (FAHEY ET AL) 29 DECEMBER 1981, see the entire document	1-70